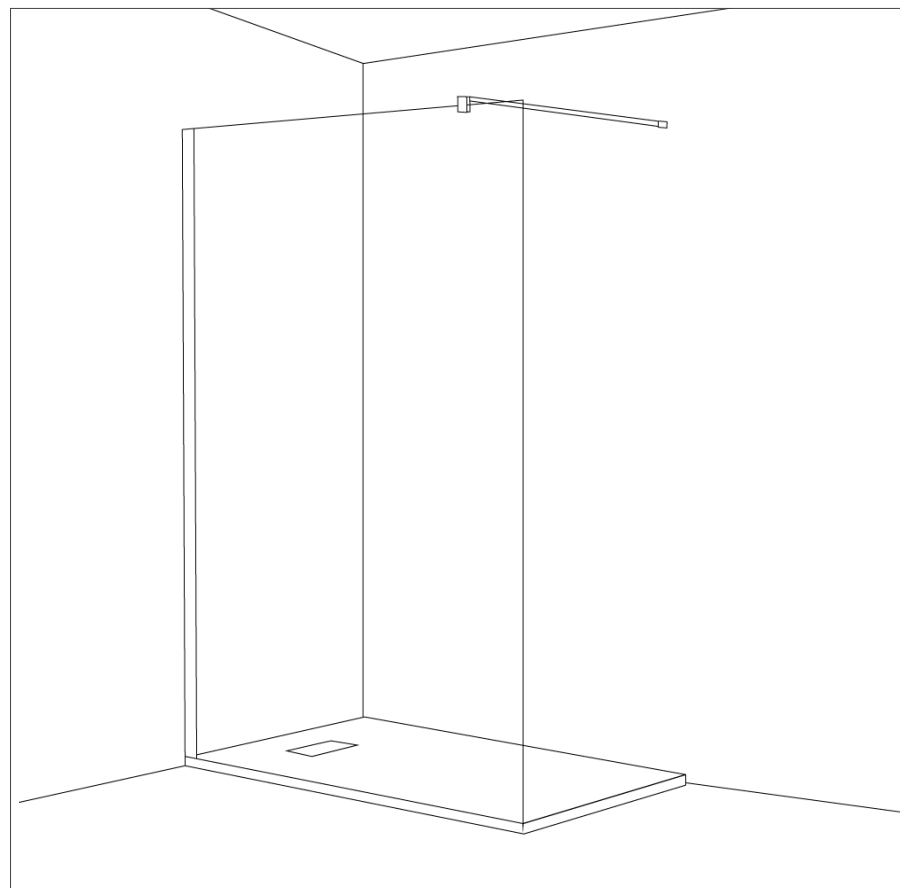








Hudson Reed



SELECTEER DE GROOTTE VAN DE DOUCHEBAK			DOUCHEBAK SPECIFICATIE			DOUCHEWAND SPECIFICATIE				BEVESTIGING	
LENGTE (CM)	BREEDTE (CM)	DIEPTE (CM)	POSITIE V/D AFVOERPLUG	GEWICHT KG	MATERIAAL	AFMETING (CM)	DIKTE (CM)	GEWICHT IN KG,	VERSTELBAAR (CM)	VORM	MATERIAAL
80	80	3		9.5	SMC	195x80	0.8	34	77,5-80	Platz	Aluminium
90	80	3		10	SMC	195 x 90	0.8	37	87,5-90	Platz	Aluminium
90	90	3		11	SMC	195x90	0.8	37	87,5-90	Platz	Aluminium
100	80	3		11	SMC	195x110	0.8	43	97,5-100	Platz	Aluminium
120	80	3		13	SMC	195x120	0.8	50	117,5-120	Platz	Aluminium
120	90	3		15	SMC	195x120	0.8	50	117,5-120	Platz	Aluminium
140	80	3		15	SMC	195x140	0.8	57	137,5-140	Platz	Aluminium
140	90	3		17	SMC	195x140	0.8	57	137,5-140	Platz	Aluminium